


## Improvements to Lower Gwynns Runs Interceptor, Phase II Baltimore, MD



### PROJECT OVERVIEW AND CHALLENGES

Bradshaw constructed six shafts in downtown Baltimore City for 2,553' of 36" gravity sewer installed in rock by TBM (gneiss up to 37,000 psi). In addition to providing tunnel access, the shafts were used to install new sewer manholes and connections to the existing system. The 16' & 24' diameter shafts (depths ranged from 18' to 57') were supported by steel ribs & wood lagging in the soft ground and rock bolts & shotcrete in the rock. Blasting was used to excavate the rock through this populated residential and commercial area of Baltimore, which included Amtrak and Norfolk Southern Railroads. The sixth shaft, 32' in diameter and 27' deep, was used for TBM recovery and connection to the existing 33" sewer through the construction of a cast-in-place junction chamber. It also contained multiple existing utilities that could not be removed from service and had to be supported during all operations, preventing rock blasting for excavation.

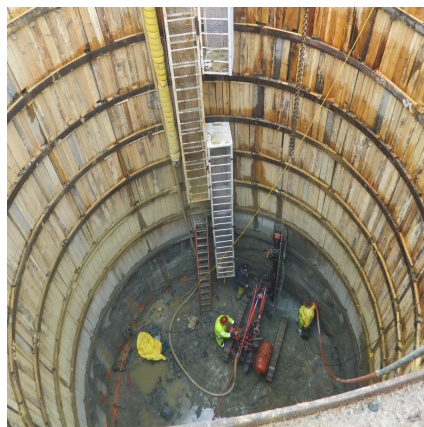

### PROJECT INFORMATION - 540

#### OWNER:

City of Baltimore  
Department of Public Works  
Joseph Belardo  
410-396-4700 ext. 371  
Joseph.Belardo@Baltimorecity.gov

#### ENGINEER:

Dewberry Consultants, LLC  
Reza Emtiaz, PE  
410-645-1400  
remtiaznooni@dewberry.com

#### CONTRACTOR:

Bradshaw Construction Corporation

#### CONTRACT VALUE:

\$11,905,600.00

#### COMPLETION DATE:

11/23/2015

#### GEOLOGY:

Baltimore Gneiss

#### EXCAVATION METHOD:

Drill & Blast

#### MINING DIMENSIONS:

4EA @ 24'x31VF, 42VF, 57VF  
& 18VF, 16'x49VF, & 32'x27VF

#### FINAL LINING:

Rock Bolts / Shotcrete  
Rib & Board

#### FOR MORE INFORMATION:

Todd Brown, Project Manager  
410-970-8300  
tbrown@bradshawcc.com  
Refer to Project 540